

# ADM500 Series

# ETUAN

It is designed for flexibility, through module concept;

Allowing quick switches over to different application;

Cost effective dispensing solution for many industry applications

## Dispensing Processes

- Flip Chip Under-Fill
- Encapsulation
- Continuous Path
- Dotting
- Two Part Mixing
- Others



ADM525-IL

### (1) Dispensing Aspect


- Dot Rate\* : 10,000 dots per hour (Needle)  
12,000 dots per hour (Non-Contact)
- Dispensing Area : 200mm(X) 150mm(Y) 50mm(Z)
- Valve Mounting : Max 2 nos

### (2) 'X' Robot Gantry Data

- Working Size : 300mm(X) 200mm(Y) 50mm(Z)
- Working Pay Load : Max 5kgf
- Resolution : 10 microns
- Repeatability : ± 25µm
- Accuracy : ± 25µm
- Speed\*\* : Max 700mm/sec for X & Y Axes  
Max 400mm/sec for Z axis

### (3) Programming

- Software : ADM.exe v4.5  
c/w User Application Programming (UAP -ADM v3.0)
- Program Size : Hard Disk Capacity
- Program Method : Remote Mode Through PC

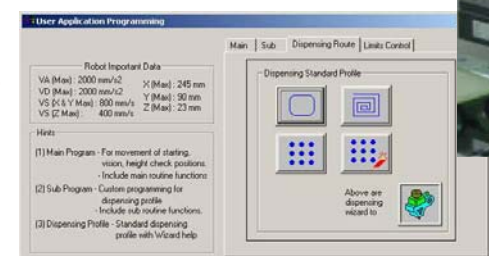

ETUAN "ADM500 Series" offer high quality dispensing solution with flexible and expandable function through high speed and high precision performance.

The equipment configuration come with semi/ fully automatic with stand-alone or in-line. Dispensing module can be equipped with high quality Jetting Valve (Non-Contact), Positive Displacement Servo Rotary Valve & etc.

Our products are widely used in Semicon, PCBA/SMT, automotive, electronics & other industries.



ETuan Mechatronic Pte Ltd  
Block 7, Kaki Bukit Road 1, #03-12, Eunos Technolink,  
Singapore 415937

Tel: +65 6482 1220  
Fax: +65 6482 2887

Email: [sales@etuan.com.sg](mailto:sales@etuan.com.sg)  
Website: [www.etuan.com.sg](http://www.etuan.com.sg)



# Liquid Dispensing System ADM500 Series